

Advanced
Construction
Technologies



Seal Leaks

SPETEC PUR H100

Semi-Rigid Polyurethane Injection Resin For Waterproofing

Product Identifier

Product Name

SPETEC PUR H100

SPETEC PUR H100 is a water activated semi-flexible polyurethane foam injection resin.

Supplier Details

Alchatek
4508 Bibb Blvd
Tucker, GA 30084
T: (404) 618-0438

Emergency Phone Numbers

Call CHEMTREC
Day or Night

1-800-424-9300
+1 703-527-3887

Description

SPETEC PUR H100 is a water activated semi-flexible polyurethane foam injection resin.

Uses

- Water cut-off of large flow and high pressure water leaks.
- Water cut-off of water leaks in foundations such as diaphragm walls, piling sheets and secant piles.
- Stabilization and water cut-off of large cracks, voids and gravel layers.
- Pre and post injections in mines, tunnels, pipe jacking, drill & blast and TBM applications.
- Injections in combination with cement-based grout.
- Crack and gravel layer injections in concrete structures.
- Soil stabilization and anchors in porous geology.
- Water cut-off of sewer water leaks and sewer stabilization.
- Probe grouting for below grade pipes.
- Manhole injections.

Advantages

- One component.
- Different reaction times are possible by adjusting the percentage of GEN ACC or GEN ACC Special accelerator.
- The closed-cell structure of cured polyurethane ensures permanent sealing of cracks and joints.
- Cured polyurethane exhibits high strength and good chemical resistance (contact our Technical Service for chemical resistance).
- Cured polyurethane is harmless for the environment and resistant to biological attack.
- Certified by ALS Global to NSF/ANSI/CAN 61 (approved for contact with drinking water).

SPETEC PUR H100


SEMI-RIGID POLYURETHANE INJECTION
RESIN FOR WATERPROOFING

Application

Note: the following are a few typical application descriptions. In case of other jobsite parameters, please contact our technical department.

PRELIMINARY ANALYSIS

For leaking joints, identify if the cold joint runs vertically or horizontally. Injection holes have to be angle drilled into the joint. For leaking cracks, drill the injection holes in a zig-zag pattern around the crack to make sure that the injection hole intersects the crack.

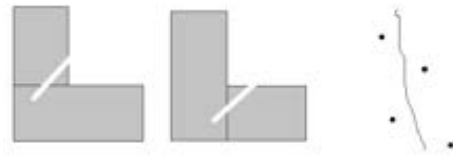

PREPARATION OF THE SUBSTRATE

Drill at 45° angle into the crack or joint. Ideally the injection hole should intersect the joint or crack half way through the thickness of the wall or slab. Blow the dust out of the injection hole with a probe that reaches the back of the hole. Fix a packer of the right diameter into the injection hole.

PREPARATION OF THE PRODUCT

Read the technical and safety data sheets prior to commencement of the injection works. Vigorously shake the GEN ACC or GEN ACC Special accelerator before use and add the required quantity (2-10%) into the Spetec PUR H100 resin. Mix the accelerator homogeneously into the resin and protect against moisture and rain to prevent premature reaction. Only mix the amount of material that can be used the same day.

PREPARATION OF THE EQUIPMENT

Depending on the application, injection can be carried out using a hand pump, pneumatic pump or electric pump. Use separate pumps for injection of water and polyurethane resin. Check that the pump is working properly. Prior to injection, the resin pump must be flushed with appropriate pump flush and be completely free of water to prevent pump blockage.

APPLICATION

- Start the injection at the first packer; for vertical joints or cracks this is usually the lowest packer.
- Do not over pressurize while injecting; the correct injection pressure is the pressure that allows to resin to flow into the crack or joint. Avoid injecting at pressures of more than 1500psi (100bar).
- If unreacted resin comes out of the joint or crack, stop the injection and move on to the next packer.
- After the last injection of resin into the packer, shoot a little bit of water into the packer in order to make sure that the last injected resin will react as well.
- Only catalyze the resin you will use within the next few hours.
- Do NOT leave resin catalyzed with accelerator in pumps overnight or material will harden and permanently damage equipment.
- Always flush the pump out at the end of the day. Resin left in the pump overnight can damage the pump.

SPETEC PUR H100

SEMI-RIGID POLYURETHANE INJECTION
RESIN FOR WATERPROOFING

REQUIRED TOOLS

Drill and drill bits of appropriate diameter and length. Mechanical Packers of appropriate diameter and length. Injection pump; manual, pneumatic or electric.

CLEANING AND MAINTENANCE

After the injection, clean the pump with AS Pump Flush. If the pump will not be used for several days, flush the AS Pump Flush out of the pump with lightweight motor oil or hydraulic fluid and leave it there until the next usage. Never rinse the pump with water. After injection, remove the packers from the concrete and fill the holes with a fast setting cement or any other appropriate filler material.

Complimentary Products

For certain application where a faster reaction time is needed a special fast catalyst can be used. AS Pump Flush, Mechanical Packers, Oakum, and Injection Needles.

ADVICE/FOCAL POINTS

Avoid injecting by temperatures below -4°F (-20°C). In extreme cold conditions it is recommended to warm the resin and catalyst. Since Spetec PUR H100 is water-reactive, liquid water should be present.

Technical Data

APPEARANCE

Physical Properties - Uncured - (appearance brown liquid)

Spetec PUR H100		
Viscosity at 77°F (25°C)	(ASTM D4878-98)	±160cps (±0.16 Pa·s)
Flash Point	(ASTM D1310-86)	>302°F (>150°C)
Density	(ASTM D3505-96 [2000])	1.058 ± 0.005

Physical Properties - Cured

Spetec PUR H100		
Compressive strength		942psi (6,494.86 kPa)
Tensile strength		290psi (1,999.48 kPa)
Flexural strength		>10MPa (>100 bar)

Estimating Quantities

Consumption has to be assessed on site and is influenced by the amount of water leaking, thickness of the concrete slab or wall, presence of voids in and around the concrete, etc.

SPETEC PUR H100
SEMI-RIGID POLYURETHANE INJECTION
RESIN FOR WATERPROOFING

REACTION TIMES

Reaction Rate with GEN ACC Accelerator

%	40°F (4.44°C)		60°F (15.56°C)		77°F (25°C)		Expansion
	Start	End	Start	End	Start	End	
10	13 sec.	56 sec.	10 sec.	49 sec.	10sec.	46 sec.	18V

Reaction Rate with GEN ACC FAST Accelerator

%	41°F (5°C)		59°F (15°C)		77°F (25°C)		Expansion
	Start	End	Start	End	Start	End	
10	12 sec.	52 sec.	9 sec.	40 sec.	8 sec.	36 sec.	18V

Packaging

Spetec PUR H100 is supplied in 5 Gallon (18.9 Liter) Pails. GEN ACC and GEN ACC Special are supplied in 0.5 gallon (1.89 liter) bottles.

Storage (Recommended)

Store between 50° - 85° F (10° - 29° C).

Safety Precautions

Avoid contact with eyes and skin, always use personal protective equipment in compliance with local regulations. Read the relevant Safety Data Sheet before use. Safety Data Sheets are available on Alchatek.com. When in doubt contact Alchatek Technical Service.